



FACTORYLUX®

BULB GUARD

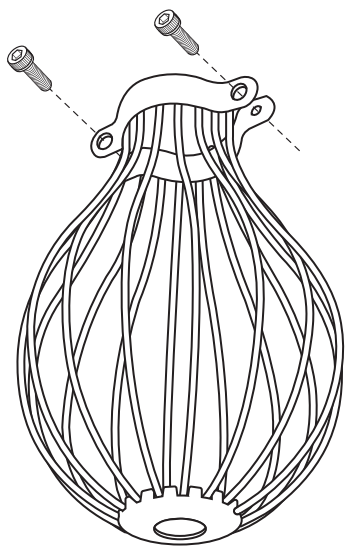

balloon | rusted S208400 | raw metal S207300 | white S209700 |
black S209800 | retro silver S207400 | ral colour S207900

WHAT'S INCLUDED



1x
4mm
allen key

YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed and hand built in the UK to give you many years of reliable service. Please read these user instructions carefully. All user instructions available to download at factorylux.com

WARNING


- For indoor use only
- Shut off power and allow light bulb to cool before installation
- Only compatible with Factorylux metal E27 lamp holder

STAY UP TO DATE


We post regular design and product information via social media and our blog. You can also contact us via instant support, twitter or email hello@factorylux.com



BULB GUARD VARIANTS



open guard
raw metal S207700

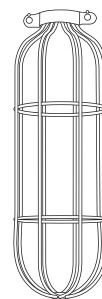

long tube
rusted S208510
raw metal S208500
retro silver S208511



small guard
raw metal S208700
retro silver S208800
rusted S208900


FACTORYLUX®

USER INSTRUCTIONS


INSTALLATION NOTES

- CAUTION:** Risk of damage to light bulb when installing cage
- See factorylux.com for light bulb compatibility
 - Fit light bulb and check function before beginning cage installation


INSTALLATION

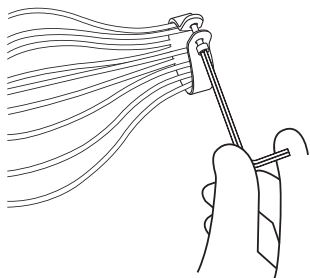


1. Remove cage bolts using supplied allen key



2. Position shade ring, flush with end of lamp holder

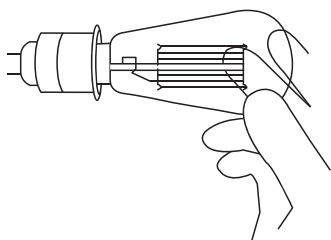


3. Fit light bulb and check function

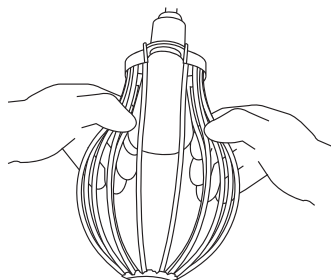


4. Gently pull the cage apart, enough to clear light bulb

INSTALLATION CONTINUED

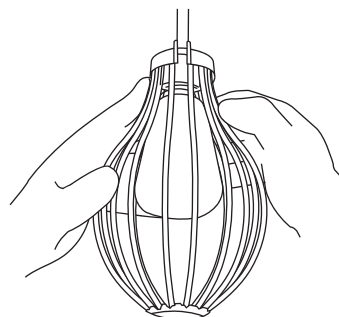

5. Sit neck of bulb guard in position at top of lamp holder body

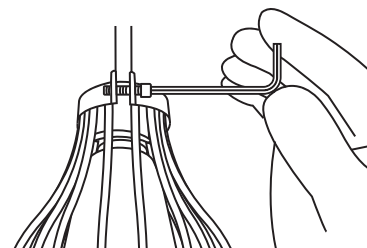

6. Evenly tighten cage bolts using supplied allen key

HANDLING & CLEANING

- WARNING:** Shut off power and allow to cool
- Wipe gently with a dry, soft, cotton cloth
 - Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect on surface patina
 - Rusted products cannot easily be cleaned

TROUBLESHOOTING

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via factorylux.com