


# FACTORYLUX<sup>®</sup>

## ECO-LED

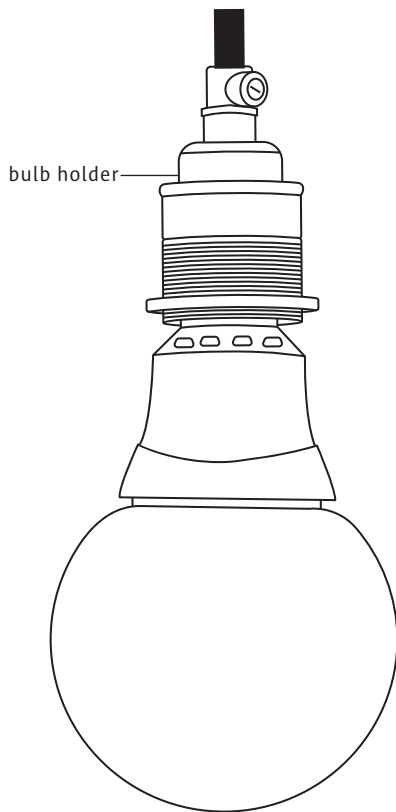

Double Click Dimming - SKU S104050

### YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed in the EU to give you many years of reliable service. Please read these user instructions carefully. You can download copies at [factorylux.com](http://factorylux.com)

### WARNING

- Not suitable for use in damp or wet conditions
- Must not be used with dimmer modules

### TROUBLESHOOTING

In the event of failure, fault or damage shut off power and contact our tech department via [factorylux.com](http://factorylux.com)

### STAY UP TO DATE

We post regular design and product information via social media and our blog. You can also contact us via instant support, twitter or email [hello@factorylux.com](mailto:hello@factorylux.com)



# FACTORYLUX<sup>®</sup>

## USER INSTRUCTIONS



### PRODUCT DATA

Input current (measured)	73mA
Input current (calculated)	56.52mA
Frequency	50 - 60Hz
Start	< 0.5s
Wattage	13W
Voltage	230V
Colour	Warm white
Colour rendering index	> 90
Colour temperature	2,700K
Luminous flux	800 lumen
Beam angle	330°
Failure rate	< 5% before 25,000 hrs
Light maintenance	80% after 25,000 hrs
Rated lamp life	25,000 hrs
Switching cycles	> 100,000 cycles
Energy rating	A
Mercury (Hg)	0mg

### DIMMING

**WARNING:** Use on switch circuits only. Dimming circuits can cause over heating

- Vary brightness from 100% to 30% via a conventional light switch only



### BREAKAGES & RECYCLING


**WARNING:** Do not operate if glass dome is broken or removed

- Recycle appropriately (find recycling information at [www.recolight.co.uk](http://www.recolight.co.uk))

### HANDLING & CLEANING

**WARNING:** shut off power and allow to cool

- To change bulb:

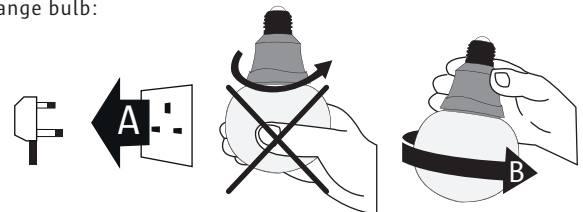

- To clean, wipe gently with a dry, soft, cotton cloth

Assembled in China  
Revision 1503

