


# FACTORYLUX®

## INDUSTRIAL | REFLECTOR SHADE

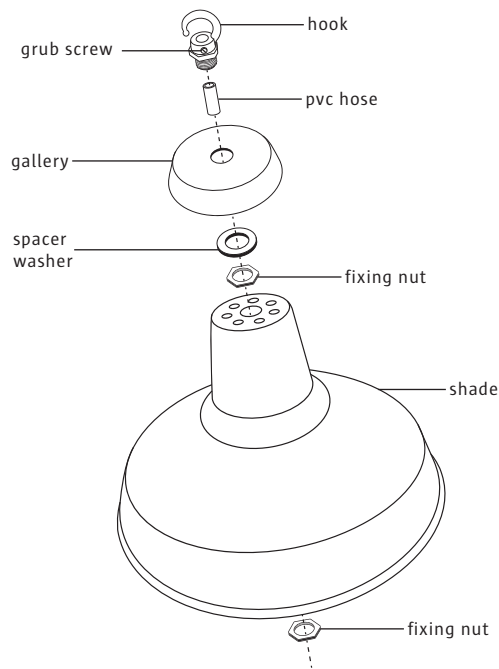

### SKU NUMBERS

360mm | S203...

matt black	100	verdigris	400
gloss black	200	copper	500
white	300	grey	600
galvanised	310	green	700
red	320	silver	800

500mm | S204...

white	200	green	500
galvanised	210	grey	600
red	220	gloss black	700
matt black	300		
silver	400		

### YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed and made entirely in the UK to give you many years of reliable service. Please read these user instructions carefully. All user instructions available to download at [factorylux.com](http://factorylux.com)

### WARNING

- Installation in accordance with current wiring and building regs and by a competent person only. Find an NICEIC registered contractor at [factorylux.com](http://factorylux.com)
- Shut off power to the circuit before installation
- For indoor use only
- Bathroom installation by authorised contractor only
- PVC hose improves cord anchorage - do not remove
- Ensure grub screws are secure - terminals must be relieved from strain and twisting
- Ensure luminaire cord is min 0.75mm<sup>2</sup> CSA and double insulated
- Always consider the total weight load when installing and suspending your light
- Maintain safe distance from surface

### STAY UP TO DATE

We post regular design and product information via social media and our blog. You can also contact us via instant support, twitter or email [hello@factorylux.com](mailto:hello@factorylux.com)




# FACTORYLUX®


## USER INSTRUCTIONS

### INSTALLATION OPTIONS

1. Standard (adjustable bulb height - swings free on cable)

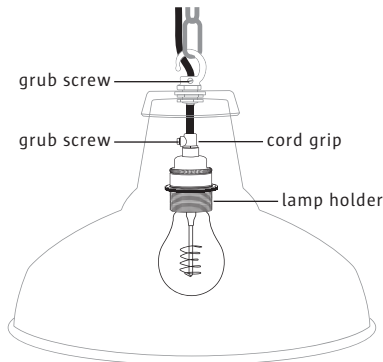


2. Coupler (non adjustable bulb height - fixed to shade)

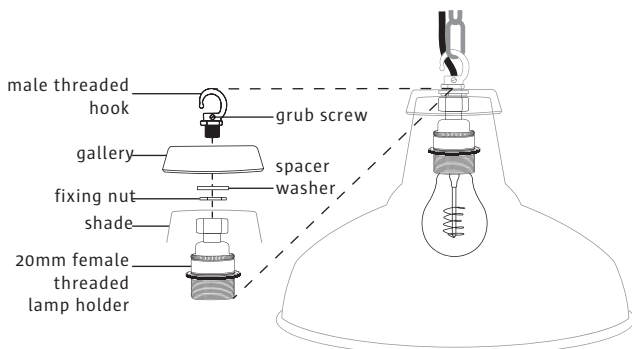

**CAUTION:** Use suitable thread-locking fluid to prevent rotation and loosening of threaded parts between lamp holder and hook

### INSTALLATION OPTIONS CONT

3. Conduit (non adjustable bulb height - fixed to shade)

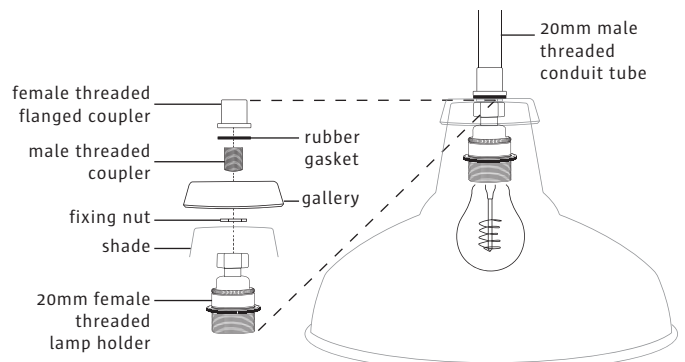

**CAUTION:** Use suitable thread-locking fluid to prevent rotation and loosening of threaded parts between lamp holder and conduit

### TROUBLESHOOTING

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via [factorylux.com](http://factorylux.com)

### HANDLING & CLEANING

**WARNING:** Shut off power and allow to cool

- Wipe gently with a dry, soft, cotton cloth
- Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect

Designed & made entirely in the UK  
Revision 1603