



# FACTORYLUX®

## FAIRGROUND HANGING LAMP

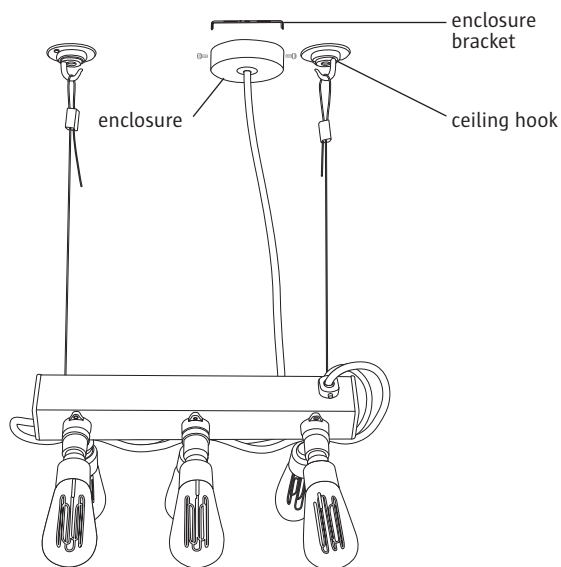

### WHAT'S INCLUDED

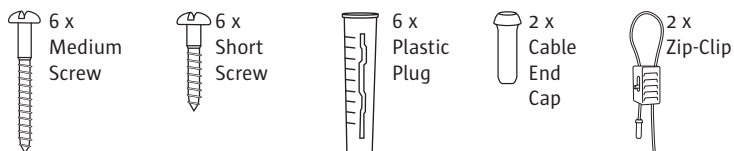

### TOOLS REQUIRED

- Drill + 6mm masonry bit
- 6mm + 4mm + 3mm flat head screwdrivers
- Pliers or crimping tool

### INSTALLATION NOTES

- Enclosure is designed to be fixed to a solid horizontal
- Ensure mounting surface and fixings are suitable to bear weight of light fitting before installing

### INSTALLATION

**WARNING:** Light fitting to be insulated and earthed in accordance with current wiring regs

#### SUSPENSION

1. Mark out position of suspension hooks
2. Drill 2 x 6mm holes x 30mm deep at 50.8mm centre spacings for each hook
3. Insert plastic plugs into holes
4. Use 6mm screwdriver and supplied medium screws to fix hooks to horizontal surface (alternatively, use supplied short screws only to fix to timber surface)
5. Hook steel suspension cable loops over each hook
6. See 'ADJUSTING' to alter the length

#### MAINS CONNECTION

1. Drill 2 x 6mm holes x 30mm deep at 50.8mm centre spacings
2. Insert plastic plugs into holes
3. Use 6mm screwdriver and supplied medium screws to fix bracket to horizontal surface (alternatively, use supplied short screws only to fix luminaire to timber surface)
5. Use supplied WAGO connectors to make L, N and  $\perp$  connections (asper 'wiring diagram')
- Flip integrated orange lever up to open position
- Insert exposed conductor to stopping point
- Return lever to closed position
5. Re-attach enclosure to bracket using knurled bracket screws

### YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed and hand built in the UK to give you many years of reliable service. Please read these user instructions carefully.

### WARNING

- Light fitting to be installed by a competent person, in accordance with current wiring and building regs. Find an NICEIC registered contractor at [factorylux.com](http://factorylux.com)
- Shut off power before installation, adjusting or handling
- Nominal frequency 50Hz
- Bathroom installation by authorised contractor only
- Must be permanently fixed to mounting surface
- Always use fixings appropriate for your mounting surface (screws and wall plugs supplied may not be suitable)
- Do not hang light fitting from electrical cable - weight load must be supported by supplied steel suspension cable, from hooks provided
- Do not exceed wattage specified on product label
- Ends of steel suspension cable can become sharp when cut - ensure protective end caps are applied if trimming cable to avoid injury
- Fit lamps after luminaire installation.

### TROUBLESHOOTING

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via [factorylux.com](http://factorylux.com)


### STAY UP TO DATE

We post regular design and product information via social media and our blog. You can also contact us via instant support or email [support@factorylux.com](mailto:support@factorylux.com)



### WIRING DIAGRAM

**WARNING:** Ensure no loose copper strands

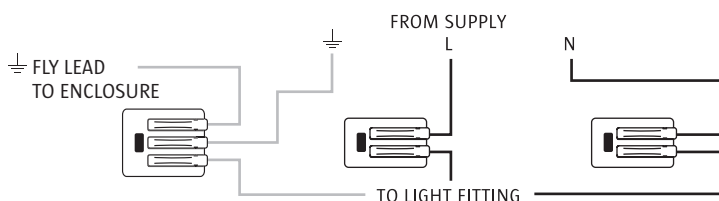

### ADJUSTING

**WARNING:** Shut off power and allow to cool

**CAUTION:** Ensure weight of luminaire is supported before adjusting suspension cable

- Zip-Clip can be positioned on cable to set desired suspension height. Once set, suspension cable can be cut. Surplus cable is to be trimmed and supplied end cap crimped to protect sharp end.

### HANDLING & CLEANING

**WARNING:** Shut off power and allow to cool

- Wipe gently with a dry, soft, cotton cloth
- Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect

Designed, made & tested in the UK to BS EN 60598

1\_INS\_FAIRGROUND-HANGING-LAMP\_1811

© Factorylux. All rights reserved. Factorylux is a registered trade mark

Factorylux | Greenhill Mills | Hebden Bridge | HX7 5QF | United Kingdom

