



FACTORYLUX[®]

IP54 CEILING LIGHT

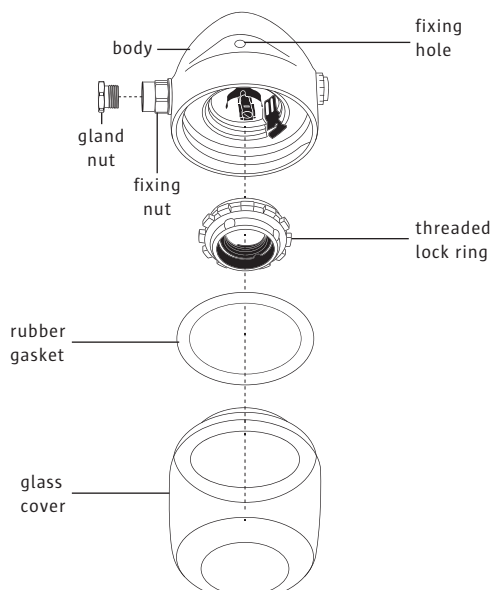

SKU S307010-V

WHAT'S INCLUDED

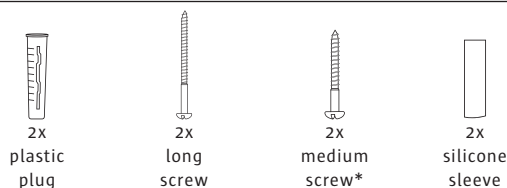

* medium screws not suitable for this light fitting

YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been assembled in the UK to give you many years of reliable service. Please read these user instructions carefully. All user instructions available to download at factorylux.com

WARNING

- Installation by a competent person, in accordance with current building and wiring regs. Find an NICEIC registered contractor at factorylux.com
- Mains supply circuit must incorporate an interruption mechanism such as a switch or a fuse
- Shut off power to circuit and verify disconnection before installing
- Rated IP 54
- Class II - cable must be double insulated
- Gland compatible with min 4mm OD / max 8.4mm OD sheathed cable
- Use 2 core cable, or 3 core with suitably insulated earth cable termination
- Gland must clamp directly on to PVC or rubber
- Gland is not compatible with twisted fabric cable
- Ensure rubber gasket is in position, failure could affect IP rating
- Use supplied silicone sleeves to protect supply cables from overheating
- Do not exceed max. wattage specified on ceiling light (exception: Factorylux Classic 40w or 60w filament lamp)
- Always use fixings appropriate for the mounting surface (screws supplied may not be suitable)
- Over-tightening fixing screws could damage ceramic

TROUBLESHOOTING

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via factorylux.com

STAY UP TO DATE

We post regular design and product information via social media and our blog. You can also contact us via email, instant support or twitter. Our system is efficient - response times are measured in minutes, not hours.



FACTORYLUX[®]

USER INSTRUCTIONS

TOOLS REQUIRED

- Drill + 6mm masonry bit
- 6mm + 3mm flat head screwdriver
- 24mm + 26mm open spanner

INSTALLATION NOTES

- If using fabric cable, we recommend using heat shrink to secure fabric sleeve, however the gland must still clamp directly on to PVC or rubber in order to maintain IP rating
- Instructions are for light fitting installation only. Mains connection with compatible IP rating is required

INSTALLATION (MASONRY SURFACE)

WARNING: Light fitting to be installed in accordance with current building and wiring regs

1. Drill 2 x 6mm holes x 30mm deep at 105mm centre spacings
2. Insert plastic plugs into holes
3. Carefully remove glass cover and rubber gasket. Store safely
4. Release locking mechanism (see 'unlocking') and unscrew threaded locking ring from body
5. Feed compatible cable through gland until at correct position
6. Grip fixing nut with 26mm spanner while tightening gland nut with 24mm spanner **CAUTION:** Terminals should be relieved from strain or twisting
7. Slide supplied silicone sleeves over supply cables
8. Use 6mm screwdriver to terminate L and N cable (see 'wiring diagram')
9. Use 6mm screwdriver and supplied long screws to fix body to surface
10. Re-attach threaded locking ring until the lock snaps into place
11. Install suitable light source before carefully re-attaching rubber gasket and glass cover


HANDLING & CLEANING

WARNING: Shut off power and allow to cool


- Wipe gently with a dry, soft, cotton cloth
- Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect

UNLOCKING

To unlock, depress black locking tab with 3mm flat head screwdriver and unscrew threaded lock ring from body



WIRING DIAGRAM



1. Strip suitable length of insulation from L and N cables
2. Twist stripped ends and wrap clockwise around terminal screws
3. Firmly secure conductors under terminals **WARNING:** There should be no loose strands

Made in Poland and assembled in the UK

Revision 1602

