


# FACTORYLUX<sup>®</sup>

## SWAN NECK LIGHT

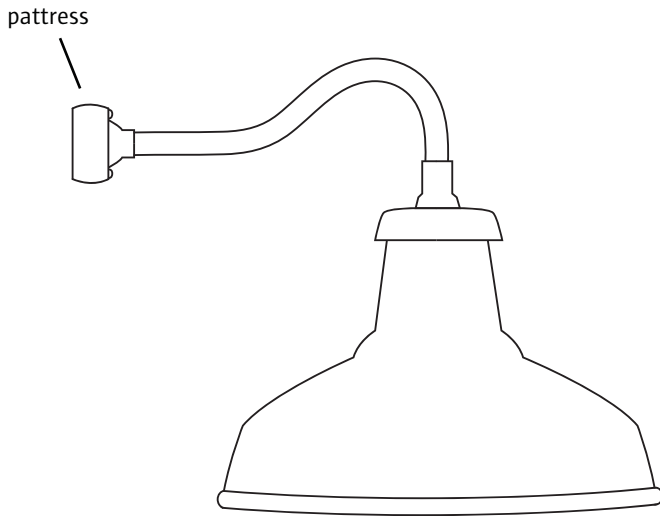

### YOUR PRODUCT

Thank you for purchasing this Factorylux product. It has been designed and hand built in the UK to give you many years of reliable service. Please read these user instructions carefully. All user instructions available to download at [factorylux.com](http://factorylux.com)

### WARNING


- Nominal frequency 50Hz
- This light fitting must be installed by a competent person, in accordance with current wiring and building regs. Find an NICEIC registered contractor at [factorylux.com](http://factorylux.com)
- For indoor use only
- Shut off power to the circuit before installation
- Always use fixings appropriate for the mounting surface (screws supplied may not be suitable)
- Do not exceed wattage specified on product label (for Factorylux filament lamp exceptions - contact [hello@factorylux.com](mailto:hello@factorylux.com))
- Bathroom installation by authorised contractor only

### STAY UP TO DATE

We post regular design and product information via social media and our blog. You can also contact us via instant support, twitter or email [hello@factorylux.com](mailto:hello@factorylux.com)



### WHAT'S INCLUDED

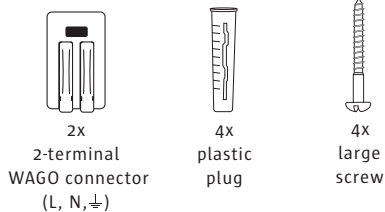

# FACTORYLUX<sup>®</sup>

## USER INSTRUCTIONS

### TOOLS REQUIRED

- Drill + 10mm masonry bit
- 6mm flat head screwdriver
- #3 Phillips screw driver (PH3)

### INSTALLATION NOTES

- Luminaire is designed to be fixed to a solid horizontal or vertical surface, using appropriate fixings

### INSTALLATION (MASONRY SURFACE)

**WARNING:** Light fitting to be insulated and earthed in accordance with current wiring regs

1. Remove pattress from luminaire by unscrewing brass screws
2. Drill 4 x 10mm holes x 55mm deep, using pattress holes as template
3. Insert plastic plugs into holes
4. Use screwdriver and supplied large screws to fix light fitting to the surface (alternatively, use supplied large screws only to fix to a timber surface)
5. Use supplied WAGO connectors to make L, N and  $\perp$  connections
  - Flip integrated orange lever up to open position
  - Insert exposed conductor to stopping point
  - Return lever to closed position
6. Connect the luminaire to the pattress using the brass screws provided and a flat head screw driver

### HANDLING & CLEANING

**WARNING:** Shut off power and allow to cool

- Wipe gently with a dry, soft, cotton cloth
- Cleaning products, scratching, abrasion, damp, oils, liquids etc may have a detrimental effect

### TROUBLESHOOTING

No user serviceable parts. In the event of failure, fault or damage shut off power and contact our technical department via [factorylux.com](http://factorylux.com)

### DID YOU KNOW... ?

You can find out when and by whom your product was made, tested and certified to BS EN 60598 / BS 4533. Search the unique batch code (affixed to the cable) at [factorylux.com](http://factorylux.com). You'll even find out what was hot news in the Hebden Bridge Times the day your product was made